



BRITISH  
STANDARD  
WIRING ACCESSORIES



# *Signature*

ONE WAY  
AND  
TWO WAY SWITCHES



*Signature*

ONE WAY AND TWO WAY SWITCHES



R1011



R1021



R1031



R1041




R1011/LED



R1001B

**FEATURES:**

- Made from high gloss impact resistant UV stabilized thermoplastic
- Extra high rating 16AX / 20A
- Large dolly for ease of operation
- Fitted with indicator for ease of identification in darkness
- Designed with concealed screws
- Standard mounting center 86 x 86 mm
- Accommodates 25 / 35 / 47 mm back boxes
- Fixing dimension 60.3 mm
- Terminals made from copper & brass with silver contacts for better efficiency and durability
- Tested & Guaranteed for 40,000 operations

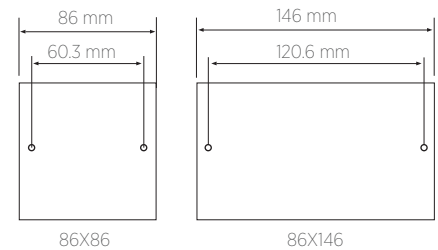

PART NO	DESCRIPTION	RANGE	OPERATING VOLTAGE	STANDARD	STD-PK
R1011	SWITCH 1G 1WAY SP 16AX20A	SIGNATURE	250V AC	IEC 60669-1	10
R1012	SWITCH 1G 2WAY SP 16AX20A	SIGNATURE	250V AC	IEC 60669-1	10
R1021	SWITCH 2G 1WAY SP 16AX20A	SIGNATURE	250V AC	IEC 60669-1	10
R1022	SWITCH 2G 2WAY SP 16AX20A	SIGNATURE	250V AC	IEC 60669-1	10
R1031	SWITCH 3G 1WAY SP 16AX20A	SIGNATURE	250V AC	IEC 60669-1	10
R1032	SWITCH 3G 2WAY SP 16AX20A	SIGNATURE	250V AC	IEC 60669-1	10
R1041	SWITCH 4G 1WAY SP 16AX20A	SIGNATURE	250V AC	IEC 60669-1	10
R1042	SWITCH 4G 2WAY SP 16AX20A	SIGNATURE	250V AC	IEC 60669-1	10
R101S	INTERMEDIATE SWITCH 16AX	SIGNATURE	250V AC	IEC 60669-1	10
R1001B	BELL PRES SWITCH 1G 6A	SIGNATURE	250V AC	IEC 60669-1	10



BRITISH  
STANDARD  
WIRING ACCESSORIES



# *Signature*

DOUBLE POLE  
SWITCHES





*Signature*

DOUBLE POLE SWITCHES




R1020DPN



R1045DPN/T





R1045DPN

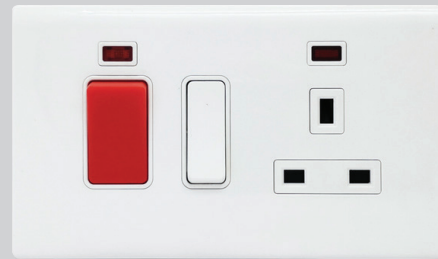

R1013/45/13S

**FEATURES:**

- Made from high gloss impact resistant UV stabilized thermoplastic
- Double pole switches rated 20-45A
- Designed with concealed screws
- Standard mounting center 86 x 86 & 86 x 146 mm
- Accommodates back boxes 35 & 47 mm depth
- Fixing dimension 60.3 & 120.6 mm
- Terminals manufactured from copper and brass with silver contacts for better efficiency and durability
- Suitable for domestic appliances like; Water Heaters, Cooking appliances, Room Heaters, Microwaves & Air Conditioners
- Tested & Guaranteed for 40,000 operations

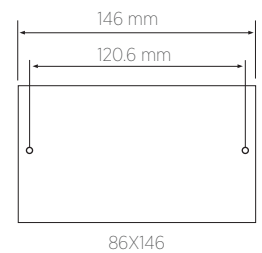

PART NO	DESCRIPTION	RANGE	OPERATING VOLTAGE	STANDARD	STD-PK
R1020DPN	DP SWITCH WITH NEON 1G 20A	SIGNATURE	250V AC	IEC 60669-1	1
R1045DPN	DP SWITCH WITH NEON 1G 45A (3X3)	SIGNATURE	250V AC	IEC 60669-1	1
R1045DPN/T	DP SWITCH WITH NEON 2G 45A (6X3)	SIGNATURE	250V AC	IEC 60669-1	5
R1013/45/13S	COOKER CONTROL UNIT 2G 45A WITH 13A SWITCHED SOCKET	SIGNATURE	250V AC	IEC 60669-1	5





BRITISH  
STANDARD  
WIRING ACCESSORIES



*Signature*



SPUR OUTLETS

*Signature*

SPUR OUTLETS



R1020/CU




R1013/FSN




R1013/FS

**FEATURES:**

- Made from high gloss impact resistant UV stabilized thermoplastic
- Designed with concealed screws
- Standard mounting center 86 x 86 mm
- Accommodates 25 / 35 / 47 mm back boxes
- Fixing dimension 60.3 mm
- Terminals made from copper & brass with silver contacts for better efficiency and durability



86X86

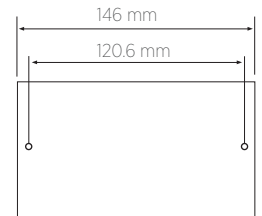

86X146

PART NO	DESCRIPTION	RANGE	OPERATING VOLTAGE	STANDARD	STD-PK
R1020/CU	CONNECTION UNIT 20A	SIGNATURE	250V AC	IEC 60669-1	1
R1013/FSN	FUSED CONNECTION UNIT WITH NEON	SIGNATURE	250V AC	IEC 60669-1	1
R1013/FS	FUSED CONNECTION UNIT	SIGNATURE	250V AC	IEC 60669-1	5



BRITISH  
STANDARD  
WIRING ACCESSORIES



# *Signature*

SWITCHED,  
UNSWITCHED SOCKETS


••  
SINGLE AND DOUBLE POLE






*Signature*

SWITCHED, UNSWITCHED SOCKETS




R1013



R1013T



R1013N

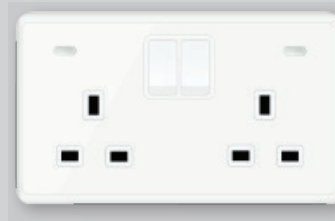

R1013TN





R1013S



R1013TS

**FEATURES:**

- Made from high gloss impact resistant UV stabilized thermoplastic
- Manufactured to 13 Amps
- Fitted with indicator for ease of identification in darkness
- Designed with concealed screws
- Standard mounting center 86 x 86 & 86 x 146 mm
- Accommodates back boxes 35 & 47 mm depth
- Fixing dimension 60.3 & 120.6 mm
- Terminals made from copper & brass with silver contacts for better efficiency and durability
- Tested & Guaranteed for 40,000 operations

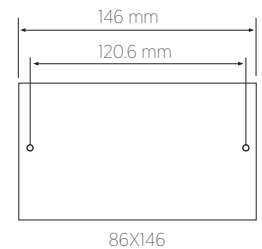

PART NO	DESCRIPTION	RANGE	OPERATING VOLTAGE	STANDARD	STD-PK
R1013	SWITCHED SOCKET SP 1G 13A	SIGNATURE	250V AC	BSEN60669-1	10
R1013N	SWITCHED SOCKET SP WITH NEON 1G 13A	SIGNATURE	250V AC	BSEN60669-1	5
R1013S	UNSWITCHED SOCKET SINGLE 13A	SIGNATURE	250V AC	BSEN60669-1	10
R1013T	SWITCHED SOCKET SP 2G 13A	SIGNATURE	250V AC	BSEN60669-1	10
R1013TN	SWITCHED SOCKET SP 2G WITH NEON 13A	SIGNATURE	250V AC	BSEN60669-1	10
R1013TS	UNSWITCHED SOCKET 2G 13A	SIGNATURE	250V AC	BSEN60669-1	10



BRITISH  
STANDARD  
WIRING ACCESSORIES



# *Signature*

SWITCHED,  
UNSWITCHED SOCKETS

••  
SINGLE AND DOUBLE POLE



*Signature*


SWITCHED, UNSWITCHED SOCKETS



R1015



R1015N



R1015S



R1005





R1005N



R1005S

**FEATURES:**

- Made from high gloss impact resistant UV stabilized thermoplastic
- Manufactured to 5/15 Amps rating
- Fitted with indicator for ease of identification in darkness
- Designed with concealed screws
- Standard mounting center 86 x 86 mm
- Accommodates back boxes 35 & 47 mm depth
- Fixing dimension 60.3 mm
- Terminals made from copper & brass with silver contacts for better efficiency and durability
- Tested & Guaranteed for 40,000 operations

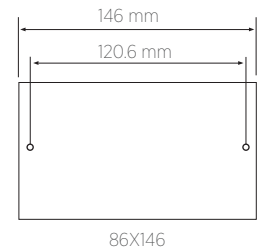

PART NO	DESCRIPTION	RANGE	OPERATING VOLTAGE	STANDARD	STD-PK
R1015	SWITCHED SOCKET 1G 15 A	SIGNATURE	250V AC	IEC 60950-1	10
R1015N	SWITCHED SOCKET 1G 15 A WITH NEON	SIGNATURE	250V AC	IEC 60950-1	10
R1015S	UNSWITCHED SOCKET 1G 15 A	SIGNATURE	250V AC	IEC 60950-1	10
R1005	SWITCHED SOCKET 1G 5 A	SIGNATURE	250V AC	IEC 60950-1	10
R1005N	SWITCHED SOCKET 1G 5 A WITH NEON	SIGNATURE	250V AC	IEC 60950-1	10
R1005S	UNSWITCHED SOCKET 1G 5 A	SIGNATURE	250V AC	IEC 60950-1	10





BRITISH  
STANDARD  
WIRING ACCESSORIES



# *Signature*

SWITCHED SOCKET  
WITH USB OUTLET  
AND  
SWITCHED SOCKET  
UNIVERSAL



*Signature*


SWITCHED SOCKET WITH USB OUTLET AND  
SWITCHED SOCKET UNIVERSAL




R1013U



R1013UN



R1013U/16U



R1013U/USB



R1013UN/USB



R1013US



R1013/USB



R1013T/USB



R10162S




R1016




R1016S

**FEATURES:**

- Made from high gloss impact resistant UV stabilized thermoplastic
- Rated to 13 Amps
- Fitted with indicator for ease of identification in darkness
- Designed with concealed screws
- Available with USB port
- Standard mounting center 86 x 86 & 86 x 146 mm
- Accommodates back boxes 35 & 47 mm depth
- Fixing dimension 60.3 mm & 120.6 mm
- Terminals made from copper and brass with silver contacts
- Tested & Guaranteed for 40,000 operations



86X86



86X146

PART NO	DESCRIPTION	RANGE	OPERATING VOLTAGE	STANDARD	STD-PK
R1013U	SWITCHED SOCKET UNIVERSAL 13A	SIGNATURE	250V AC	BSEN60669-1	10
R1013UN	SWITCHED SOCKET UNIVERSAL 13A WITH NEON	SIGNATURE	250V AC	BSEN60669-1	10
R1013U/16U	SWITCHED SOCKET UNIVERSAL 13A WITH 2 PIN OUTLET	SIGNATURE	250V AC	BSEN60669-1	10
R1013U/USB	SWITCHED SOCKET UNIVERSAL 13A WITH USB OUTLET	SIGNATURE	250V AC	BSEN60669-1	10
R1013UN/USB	SWITCHED SOCKET UNIVERSAL 13A WITH NEON & USB	SIGNATURE	250V AC	BSEN60669-1	10
R1013US	UNSWITCHED SOCKET UNIVERSAL 13A	SIGNATURE	250V AC	BSEN60669-1	10
R1013/USB	SWITCHED SOCKET 1G 13A WITH USB	SIGNATURE	250V AC	BSEN60669-1	10
R1013T/USB	SWITCHED SOCKET 2G 13A WITH USB OUTLET	SIGNATURE	250V AC	BSEN60669-1	10
R10162S	UNSWITCHED SOCKET 2 PIN DOUBLE	SIGNATURE	250V AC	BSEN60669-1	10
R1016	SWITCHED SOCKET 2 PIN SINGLE	SIGNATURE	250V AC	BSEN60669-1	10
R1016S	UNSWITCHED SOCKET 2 PIN SINGLE	SIGNATURE	250V AC	BSEN60669-1	10





# *Signature*

TV, TELEPHONE  
AND  
DATA OUTLETS





*Signature*

TV, TELEPHONE AND DATA OUTLETS



R100TS



R1002TS



R1001TS/DT



R1001TV



R1002TV



R1001TV/DT



R1001RJ45





R1001DT/2



R1001TV/S

**FEATURES:**

- Made from high gloss impact resistant UV stabilized thermoplastic
- Designed with concealed screws
- Standard mounting center 86 x 86 mm
- Accommodates 25 / 35 / 47 mm back boxes



PART NO	DESCRIPTION	RANGE	OPERATING VOLTAGE	STANDARD	STD-PK
R1001TS	TELEPHONE SOCKET SINGLE	SIGNATURE	250V AC	IEC 60669-1	1
R1002TS	TELEPHONE SOCKET DOUBLE	SIGNATURE	250V AC	IEC 60669-1	1
R1001TS/DT	TELEPHONE & DATA SOCKET	SIGNATURE	250V AC	IEC 60669-1	1
R1001TV	TV SOCKET SINGLE	SIGNATURE	250V AC	IEC 60669-1	1
R1002TV	TV SOCKET DOUBLE	SIGNATURE	250V AC	IEC 60669-1	1
R1001TV/DT	TV & DATA SOCKET	SIGNATURE	250V AC	IEC 60669-1	1
R1001RJ45	DATA SOCKET SINGLE	SIGNATURE	250V AC	IEC 60669-1	1
R1001DT/2	DATA SOCKET DOUBLE	SIGNATURE	250V AC	IEC 60669-1	1
R1001TV/S	SATELLITE TV SOCKET SINGLE	SIGNATURE	250V AC	IEC 60669-1	1



BRITISH  
STANDARD  
WIRING ACCESSORIES



# *Signature*

LIGHT DIMMERS,  
CURTAIN SWITCHES,  
BLANK PLATES  
AND  
SHAVERS SOCKETS



*Signature*


LIGHT DIMMERS, CURTAIN SWITCHES,  
BLANK PLATES AND SHAVERS SOCKETS



R1001LD/300



R1001LD/600




R1002/CS




R1027




R1001BP




R1002BP



86X86

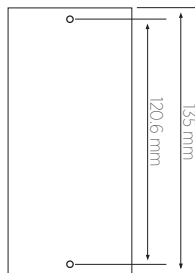

75X135

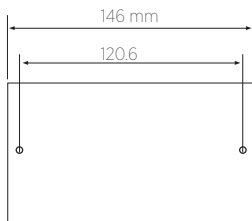

86X146

**LIGHT DIMMERS**

- Made from high gloss impact resistant UV stabilized thermoplastic
- Suitable for LED dimming.

**CURTAIN SWITCHES**

- Made from high gloss impact resistant UV stabilized thermoplastic
- Ideal for Curtains.

**BLANK PLATES**

- Made from high gloss impact resistant UV stabilized thermoplastic
- Standard mounting centers 86 x 86 & 86 x 146 mm

**SHAVERS SOCKETS**

- Made from high gloss impact resistant UV stabilized thermoplastic
- Fitted with transformer
- Suitable for selective shavers/tooth brush

PART NO	DESCRIPTION	RANGE	OPERATING VOLTAGE	STANDARD	STD-PK
R1001LD/300	LED LIGHT DIMMER 300W	SIGNATURE	250V AC	PN-EN 60669-2-1	1
R1001LD/600	LIGHT DIMMER 600W	SIGNATURE	250V AC	PN-EN 60669-2-1	1
R1002/CS	CURTAIN SWITCH	SIGNATURE	250V AC	BS EN 60669-1	1
R1027	SHAVER SOCKET	SIGNATURE	250V AC	BS EN 60669-1	1
R1001BP	BLANK PLATE 2G 3X6	SIGNATURE	250V AC	BS EN 60669-1	1
R1002BP	BLANK PLATE 1G 3X3	SIGNATURE	250V AC	BS EN 60669-1	1