



FLOOR  
BOXES

# FLOOR BOXES



## RAISED FLOOR BOX




Floor Box range is a unique, stylish and robust unit designed to give quick and simple solutions to raised access floor installations.

### GENERAL FEATURES


- Floor box for installation in screed
- Floor box with additional space above or below plates
- Shallow floor boxes
- Special finishes
- Full pre-wiring options available
- Other special requirements may be available

PRODUCT CODE	SPECIFICATIONS
RRFSB250/250/75/3	Raised floor service outlet box 250x250x75x3
RRFSB315/210/75/3	Raised floor service outlet box 310x215x75x3
RRF13ADSP	Dual Socket Plate for Raised Floor service outlet box 13 Amp
RRF13ASSP	Dual Single Socket Plate for Raised Floor service outlet box 13 Amp
RRFDSP	Data Socket Plate for Raised Floor service outlet box
RRFDSP/RJ45	Data Socket Plate for 4 RJ45 fo Raised Floor service outlet box
RRFBP	Blank Plate for Raised Floor service outlet box

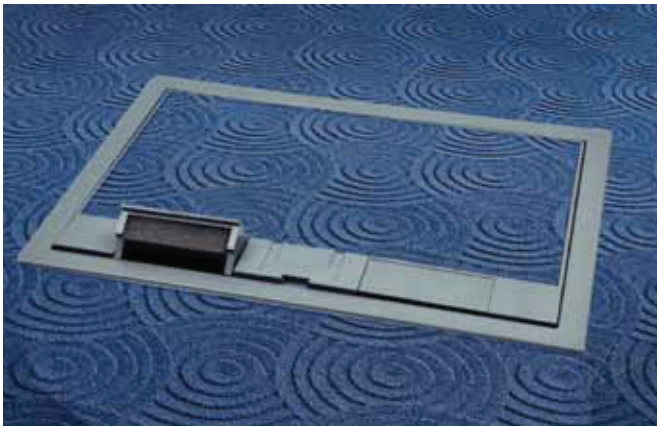

## LID TRAY ASSEMBLY

The carpet trim and lid tray are moulded from flame retardant ABS, with both having a steel reinforced section to ensure maximum rigidity. Each lid is provided with two cable outlet brackets that are securely fixed into the lid tray, together with a moulded integral lid handle. The carpet trim and lid tray can be rotated through 180° to allow the lid to be opened in either direction. Available space above plates with lid closed is 28mm and the standard colour of the moulding is dark grey.

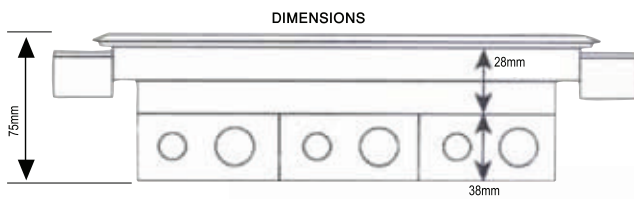

## MOUNTING FRAME

The mounting frame is manufactured from galvanised steel and is suitable for mounting into a 300x200mm hole cut into any access floor panel. The frame is provided with four spring clips with firmly anchor the frame into the floor panel.

## BOX BASE

The box base is manufactured from galvanised steel and is provided with 20mm and 25mm knockouts on all four sides. Dividing fillets are provided to separate the internal services. To ensure maximum security for the electrical services, the accessory plate fixing screws are located in an inaccessible position. Available space under accessory plates are 39mm.

